



PO Box 1847  
Post Falls, ID 83877-1847  
T 208-773-3885  
F 208-773-3799  
E <ContactUs@SummitEq.com>

Vertical balers

36"W  
48"W  
60"W  
72"W  
specialized

Horizontal closed-door balers

'B' series  
'C' series  
'D' series  
'E' series  
'F' series  
specialized

Horizontal open-end balers

Standard-duty series  
Heavy-duty 'B' series  
Heavy-duty 'C' series  
Heavy-duty 'D' series  
Heavy-duty 'E' series  
specialized

Twin-ram balers

Standard-duty series  
Heavy-duty series

Scrap metal balers

Oil filter balers

Conveyors

Slider-bed  
Chain-belt

Fluffers

Cart dumpers

**Self-contained compactors**

Stationary compactors

Design assistance with waste  
and recycling flow, site fit, etc.

# Roll-off Compactor



Shown is SC-3248/1588  
with optional "doghouse"  
hopper, extra wheels & pull  
hook for hauler turn-around

The SC-3248 and SC-4060 compactors are designed to clean up your waste site by capturing and retaining waste, including liquids. At the same time, they reduce the number of times you have to empty, saving thousands of dollars all year long.

How can one piece of equipment clean up your garbage site AND save money? Simple; by super-compressing waste down to 1/3 to 1/7 its original size. Container capacities are available from 10 to 40 yards, and savings vary. Ask for a fast, no-obligation waste-stream analysis, showing you a dollar-for-dollar comparison between your current waste bills and the reduced bills resulting from a Summit compactor.

Self-contained compactors are ideal for Restaurants, College Dorms and Cafeterias, Fast Food outlets; Hotels & Motels; Condominiums and Apartment Complexes; Groceries and Markets; Hospitals & Clinics; Shopping Malls; Prisons; Resorts & Recreational Centers; and other commercial/industrial/institutional sites.

Summit compactors are designed and built by experts with over 30 years of waste equipment experience. They offer features and benefits either unavailable or available only at extra cost elsewhere. Compare, and you'll see the difference.

***Engineered for Peak  
Performance***

## PRODUCTIVITY

- ☑ Reduce mounds of material to as little as 1/7 of its original volume
- ☑ Drainable sump for more economical emptying
- ☑ Convenient 32" × 48" or 40" × 60" top feed openings accept large trash bags full of waste
- ☑ Simple loading and operation
- ☑ Non-reversible hydraulic quick-connects from compactor to power unit speed emptying
- ☑ Supplied with hydraulic fluid for quick install
- ☑ Standard multi-cycle clears chamber every time

## DURABILITY

- ☑ Superior guided ram with replaceable self-lubricating support shoes for long life
- ☑ Heavy-duty container to withstand compaction forces for years of trouble-free service
- ☑ Reliable, industry-standard electrical and hydraulic parts for easy maintenance
- ☑ 12 month warranty on parts and labor.


## FLEXIBILITY

- ☑ Available hoppers, lids, feed doors suit various feeding and site problems, optimize loading
- ☑ Remote power/control unit with standard 6' connections movable to fit site needs
- ☑ Mix & match packing head and container Capacities to fit site and waste stream needs
- ☑ Various available feed doors or lids to optimize loading convenience
- ☑ 208V, 240V, or 480V 60Hz 3Ø, others optional

## OPTIONS

- ☑ Auto-start (close door = safety auto cycle)
- ☑ Locking feed door prevents unauthorized use
- ☑ Coded keypad for door and/or control access prevents unauthorized use
- ☑ Color matching (standard = blue, gray, tan)
- ☑ Custom sizes to fit special sites

## LAYOUT & DIMENSIONS

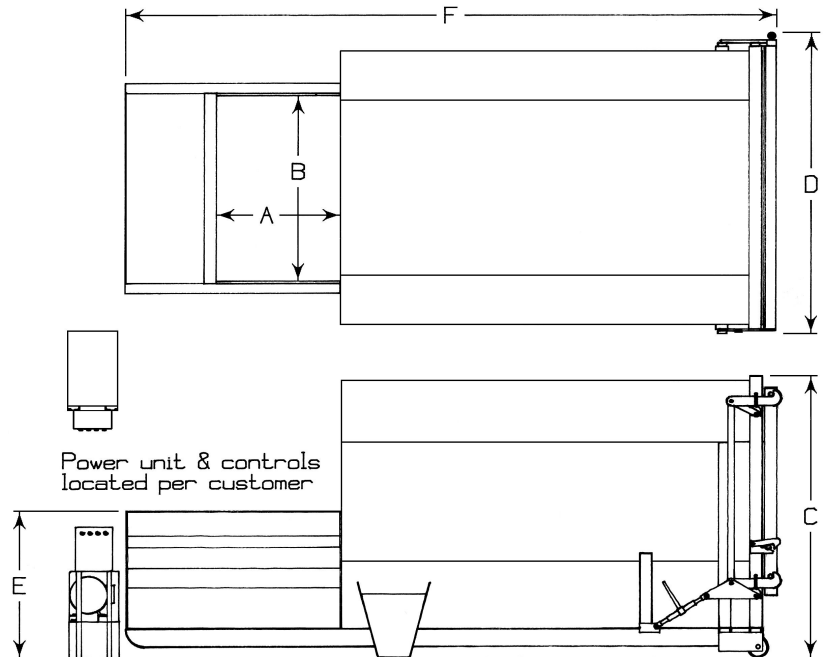

| Specifications            | SC-3248 (1-yd)                        | SC-4060 (2-yd)  |
|---------------------------|---------------------------------------|-----------------|
| Top opening ('A' x 'B')   | 32"L x 48"W                           | 40"L x 60"W     |
| Chamber capacity (mfr)    | 1 cubic yard                          | 2 cubic yards   |
| Chamber capacity (actual) | .8 cubic yard                         | 1.25 cubic yard |
| Cycle time                | 39 seconds                            | 44 seconds      |
| Throughput per hour       | 74 cubic yards                        | 102 cubic yards |
| Motor                     | 10hp for 208, 240, or 480 V 60 Hz. 3Ø |                 |
| Hydraulic pump            | 10 GPM                                |                 |
| Cylinders                 | (2) 4" x 37" bypass design            |                 |
| Total packing force       | 45,239 lb                             |                 |
| Platen face pressure      | 39.27 psi                             | 31.42 psi       |
| Platen penetration        | 14"                                   | 12.5"           |
| Certification             | UL508A/UL73/CSA C22.2 No.14           |                 |
| Dimension 'A'             | 32"                                   | 40"             |
| Dimension 'B'             | 48"                                   | 60"             |
| Dimension 'C' (8' H cont) | 91"                                   | 91"             |
| Dimension 'D' (8' W cont) | 95"                                   | 95"             |
| Dimension 'E'             | 47.5"                                 | 47.5"           |
| Dimension 'F'             | depends on container size             |                 |



Summit Equipment, Inc.  
 PO Box 1847  
 Post Falls, ID 83877-1847  
 T 208-773-3885  
 F 208-773-3799  
 E <ContactUs@SummitEq.com>