

# M72HD

**High Density Vertical Baler** 





The M72HD High Density Vertical Baler is the Ideal Solution For:

- Manufacturing Facilities
- Industrial Applications
- Recycling Centers
- Distribution Centers
- Retail Stores
- Big Box Stores

See The Video At: https://youtu.be/DRiIFAZt1nE Built to be the strongest and most reliable baler on the market today.

Compare these features of the M72HD with the competition:

- Incredibly fast 29 second cycle time reduces your work time
- Large 72"x 40"x 40" charge chamber allowing you to bale over 2,000 pounds of cardboard per hour
- Massive 7" cylinder
- 20 horsepower heavy-duty motor

- Produces over 76,930 lbs. (34,895 kg) pounds of force resulting in 1,300 pound bales of cardboard
- Programmable Logic Controller (PLC) shuts down the baler if any unsafe conditions are detected

The M72HD High Density Vertical Baler, another great idea from Harmony Enterprises...
The Undisputed Leader in Quality Manufacturing.

# M72HD High Density Vertical Baler

Optional Double Hinged Door Shown


## **Standard M72HD Features:**

- Control panel is UL® listed
- Can ship upright and be installed without ever requiring it to be tipped on it's side
- Two hand operation to protect employees
- All moving parts, including the ejector system, are totally enclosed
- Solid Loading Door
- Meets or exceeds all ANSI and OSHA requirements





Bay Area Trash Compactor 1-800-955-0866 Info@batc-compacts.com www.batc-compacts.com

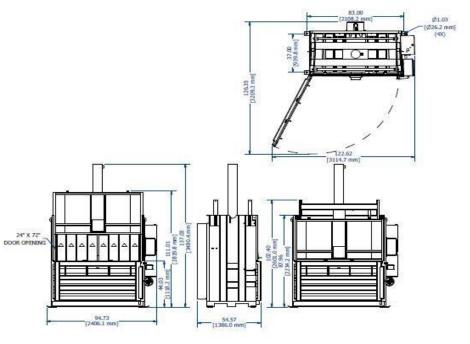

### **SPECIFICATIONS**

Bale Size	40" x 72" x up to 40" (1,016 mm x 1,829 mm x up to 1,016 mm)
Bale Weight (corrugated)	up to 1.300 lbs (590 kg)
Ram Pressure	76,930 lbs.(34,895 kg)
Cycle Time	29 seconds
Cylinder	7" bore (178 mm) 4.5" rod (114 mm) 48" stroke (1,129 mm)
Motor	20 horsepower, TEFC
Pump	16 gallon
Electrical Power	208/230/460 volt, 3 phase, 60 hz
Bale Eject	Hydarulic/Chain
Bale Tying	Wire or banding

### **DIMENSIONS**

Loading Door Opening	24" x 72" (610 mm x 1829 mm)
Unloading Door Height	44" (1,118 mm)
Overall Height	137" (3,480 mm)
Overall Depth	55" (1,397 mm)
Overall Width	95" (2,413 mm)
Depth With Door Open	126.5" (3,203 mm)
Width With Door Open	122.6" (3115mm)
Shipping Height	88" (2,235 mm)
Shipping Weight	7,320 lbs. (3,320 kg)
Installation and Operating Area	107 square feet (9.95 square meters)

Specifications subject to change without notice.